



ANCILLARY EQUIPMENT

MXR35V


*MOTOR MOUNTED CROSS LINE
RELIEF VALVE FOR MV SERIES MOTORS*

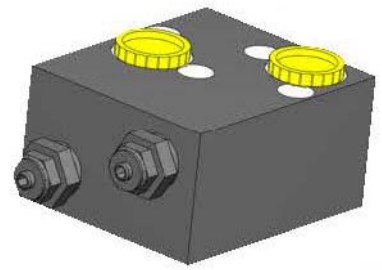


MOTOR MOUNTED CROSS LINE RELIEF VALVE FOR MS SERIES MOTORS

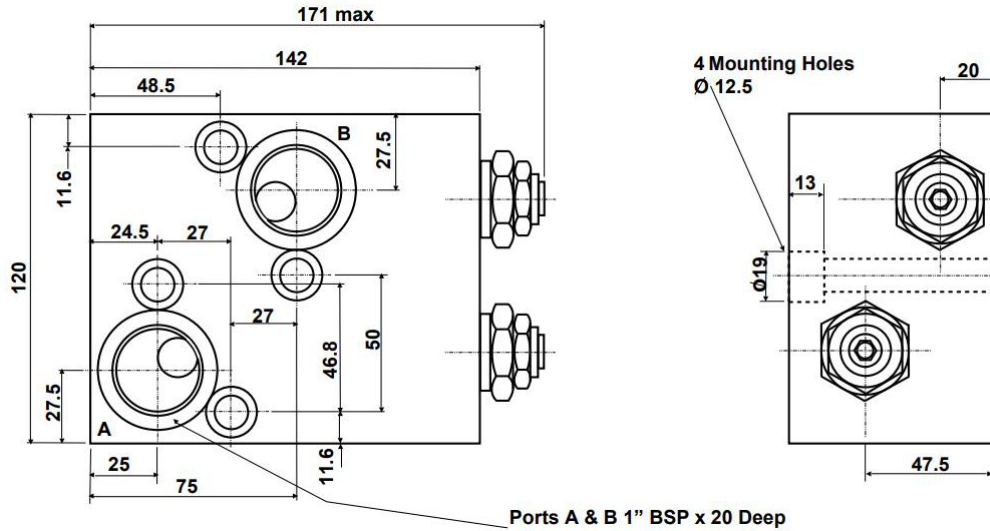

ORDERING CODE

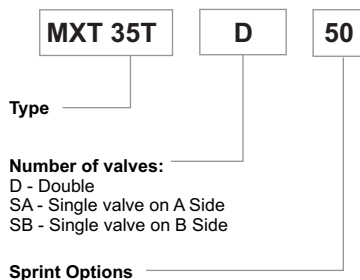


Order Code	Pressure Setting Range (Bar)	Standard Setting (Bar)
100	10 - 100	75
-Omit (Std)	10 - 200	90
250	20 - 250	130

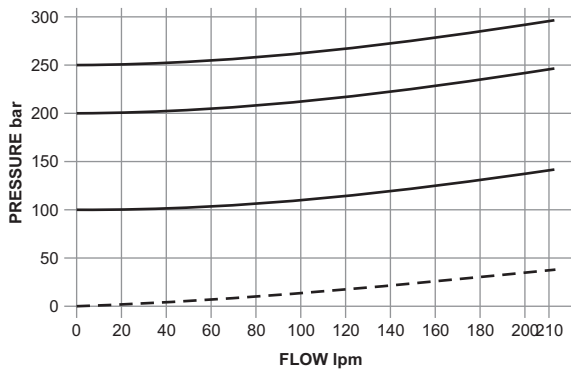

D - Double

SA - Single valve on A side

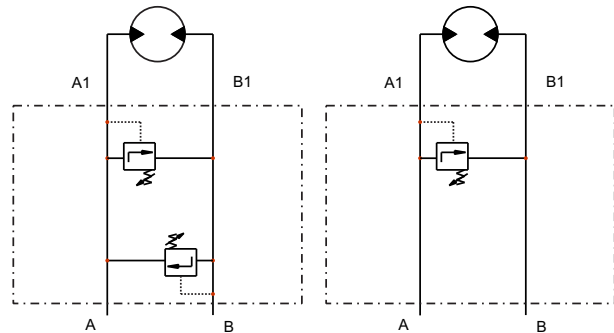

Maximum Pressure : 300 Bar

Rated Nominal Flow : 60 lpm

Mineral based Hydraulic fluids with anti-wear additives are recommended with a viscosity of 35cSt at a temperature of 50° C.

Recommended oil cleanliness ISO 19/14 with a nominal filtration of 25 micron or better.

Tightening torque for mounting screws

The policy of Adan Limited is one of continual development and the right is reserved to alter specifications without notice.



ADAN LIMITED

RIVERSIDE IND. ESTATE BOSTON LINCOLNSHIRE ENGLAND

Tel: +44 (0)1205) 311500

email: sales@adanltd.co.uk | website: www.adanltd.co.uk







ANCILLARY EQUIPMENT OCV30T


MOTOR MOUNTED OVER CENTRE
VALVE FOR MT SERIES MOTORS



MOTOR MOUNTED OVER CENTRE VALVE FOR MV SERIES MOTORS

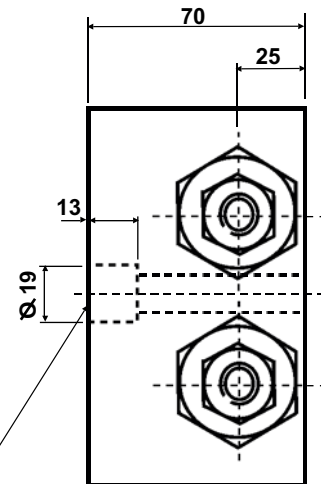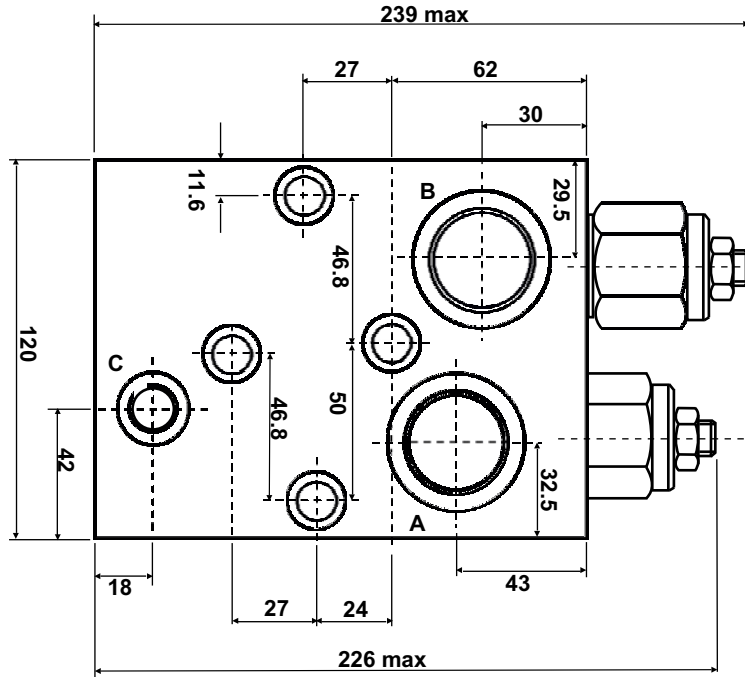

4 Mounting holes
Ø 12.5 through

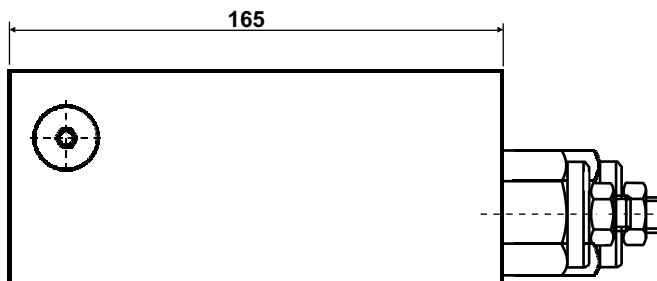

Ports A & B 1" BSP x 20 Deep
Fitting tightening torque 200 Nm

Port C Brake Release Port 1/4" BSP x 14 Deep
Fitting tightening torque 30 Nm

Maximum pressure 250 bar 3625 psi
Pressure range 70-250 bar 1015 - 3625 psi
Maximum rated flow 200 lpm
Pilot ratio 4.25:1
Valve supplied complete with mounting screws & 'o' rings.
Valves are not pre-set should a set pressure be required please state at time of order.

Mineral based Hydraulic fluids with anti-wear additives are recommended with a viscosity of 35 mm²/s at a temperature of 50°C.
Recommended oil cleanliness ISO 19/14 with a nominal filtration of 25 micron or better.
Steel body and valve sections
Tightening torque for mounting screws 65 Nm
WEIGHT 9.75 kg

The policy of Adan Limited is one of continual development and the right is reserved to alter specifications without notice.



ADAN LIMITED

RIVERSIDE IND. ESTATE BOSTON LINCOLNSHIRE ENGLAND

Tel: +44 (01205) 311500

email: sales@adanltd.co.uk | website: www.adanltd.co.uk



VALVE DETAILS

OPERATION

The check valve section allows free flow into the actuator, then holds and locks the load against movement. The pilot assisted relief valve section will give controlled movement when pilot pressure is applied. The relief section is normally set to open at a pressure of at least 1.3 times the maximum load induced pressure but the pressure required to open the valve and allow movement depends on the pilot ratio of the valve. The pressure required to open the valve and start movement can be calculated as follows:-

$$\text{Pilot Pressure} = \frac{(\text{Relief Setting}) - (\text{Load Pressure})}{(\text{Pilot Ratio})}$$


Example:- Pilot Ratio 4.25:1 Relief set at 145 bar (2100psi) and a load pressure of 114 bar (1650 psi)

$$\frac{145\text{bar (2100psi)} - 114\text{bar (1650psi)}}{4.25} = 7.3\text{bar (105psi)}$$


Any increase in pilot pressure will result in an increase in load velocity and a reduction in pilot pressure, slowing and stopping load movement.

When used with an open centre directional valve it will allow thermal expansion relief of the hydraulic fluid.

These motor mounted valves have the load control of dual overcentre valves with the additional advantage of a brake release shuttle valve for smooth safe performance.

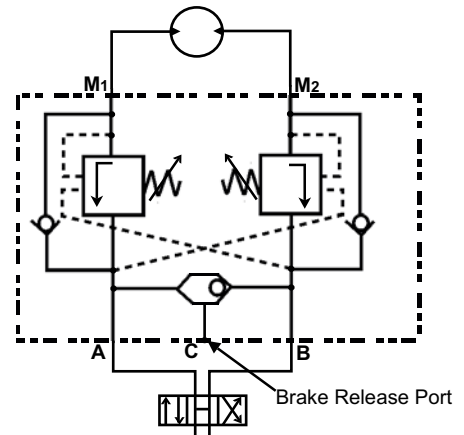

PRESSURE LOSS GRAPH

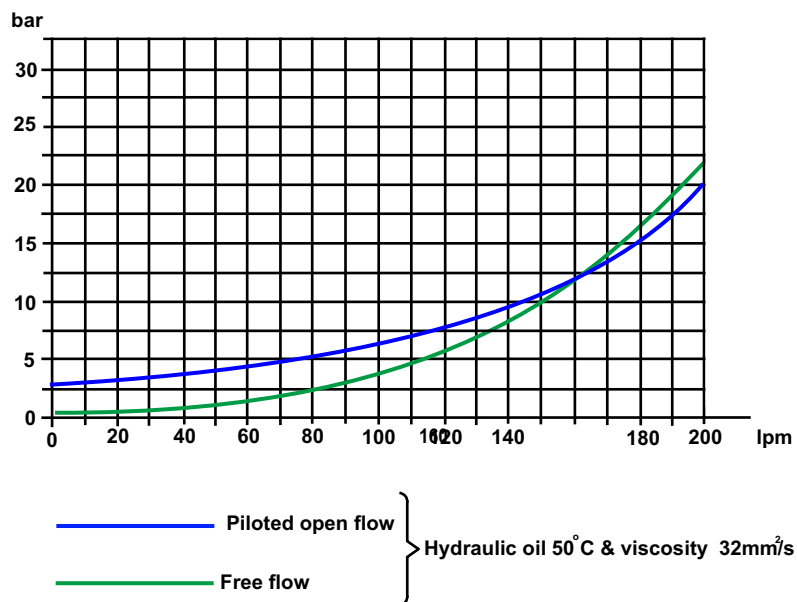

The policy of Adan Limited is one of continual development and the right is reserved to alter specifications without notice.



ADAN LIMITED
 RIVERSIDE IND. ESTATE BOSTON LINCOLNSHIRE ENGLAND
 Tel: +44 (0)1205) 311500
 email: sales@adanltd.co.uk | website: www.adanltd.co.uk

